


ZVC S90-C5-007


Minimum Requirements

- An audio (speakerµphone) system (purchase separately).
- A display connected to MCore Pro (not included).
- A Zoom Rooms account (not included).
- Wired network environment (not included).


Package Contents

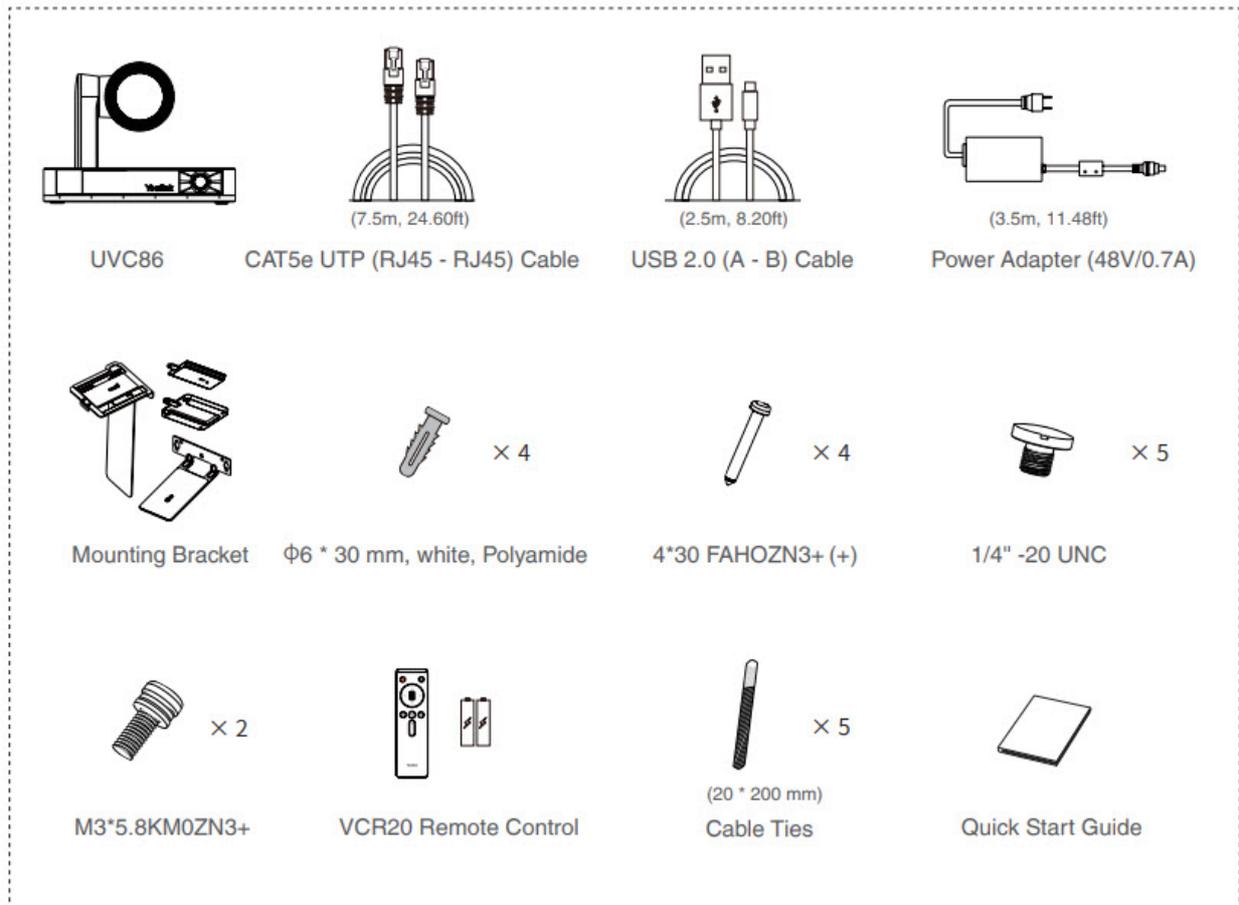


UVC86 Package*2

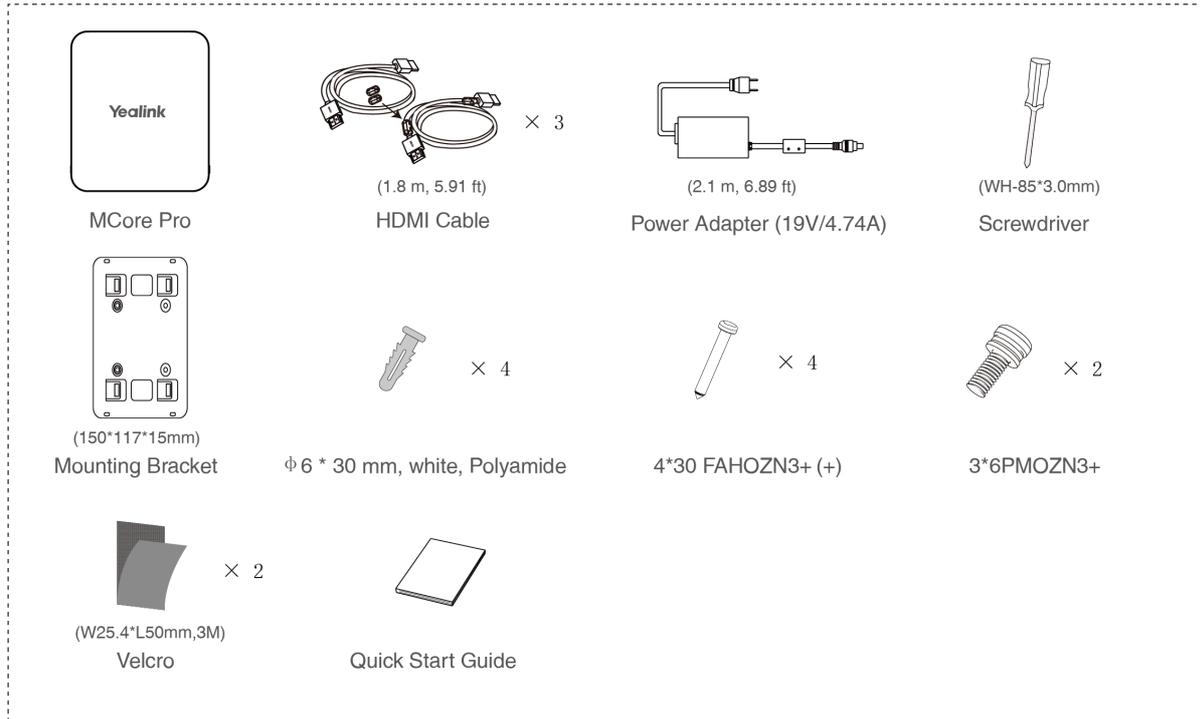


MCore Pro Package

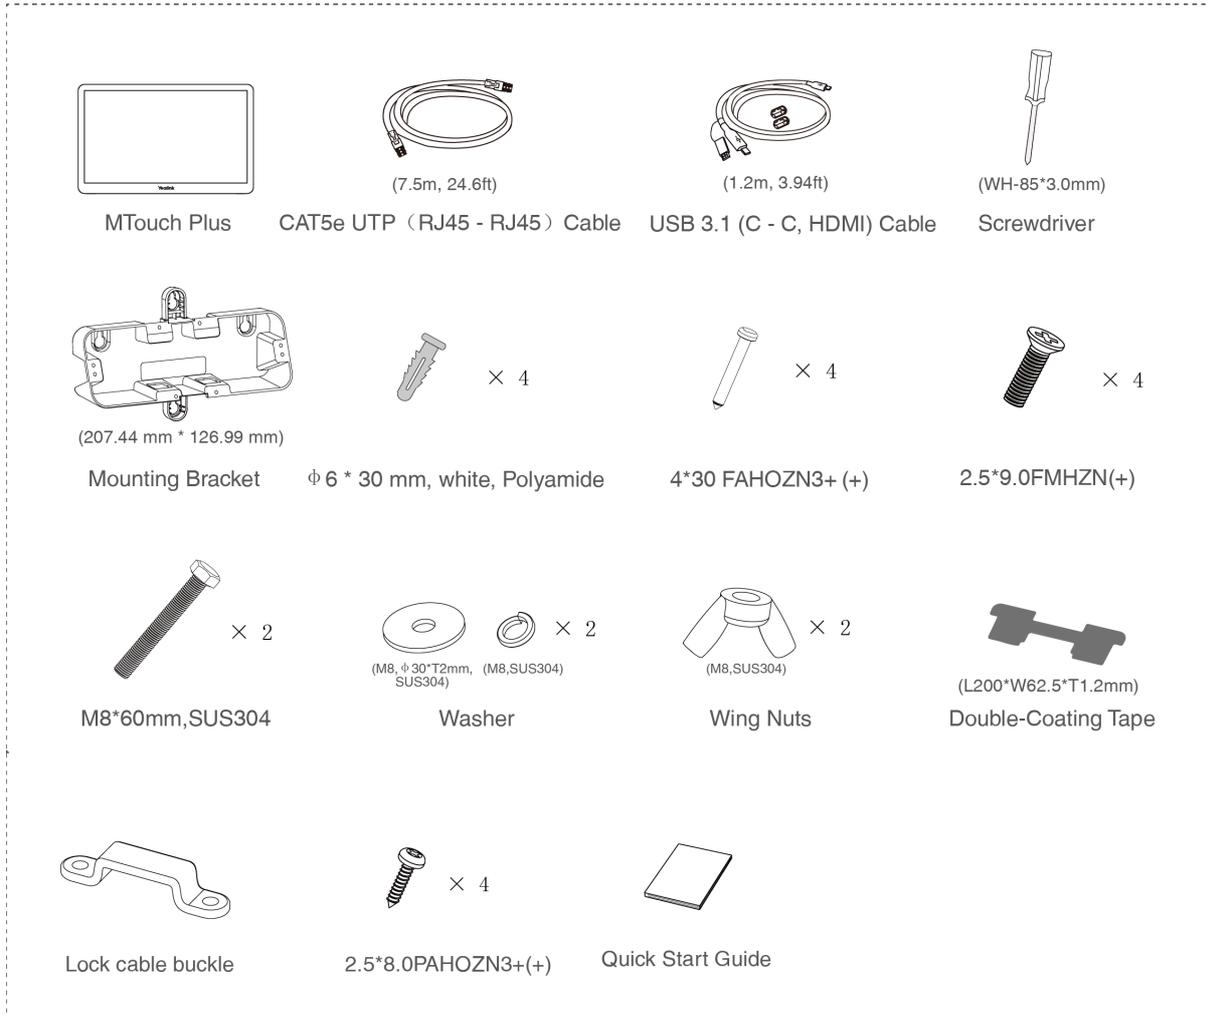

MTouch Plus Package

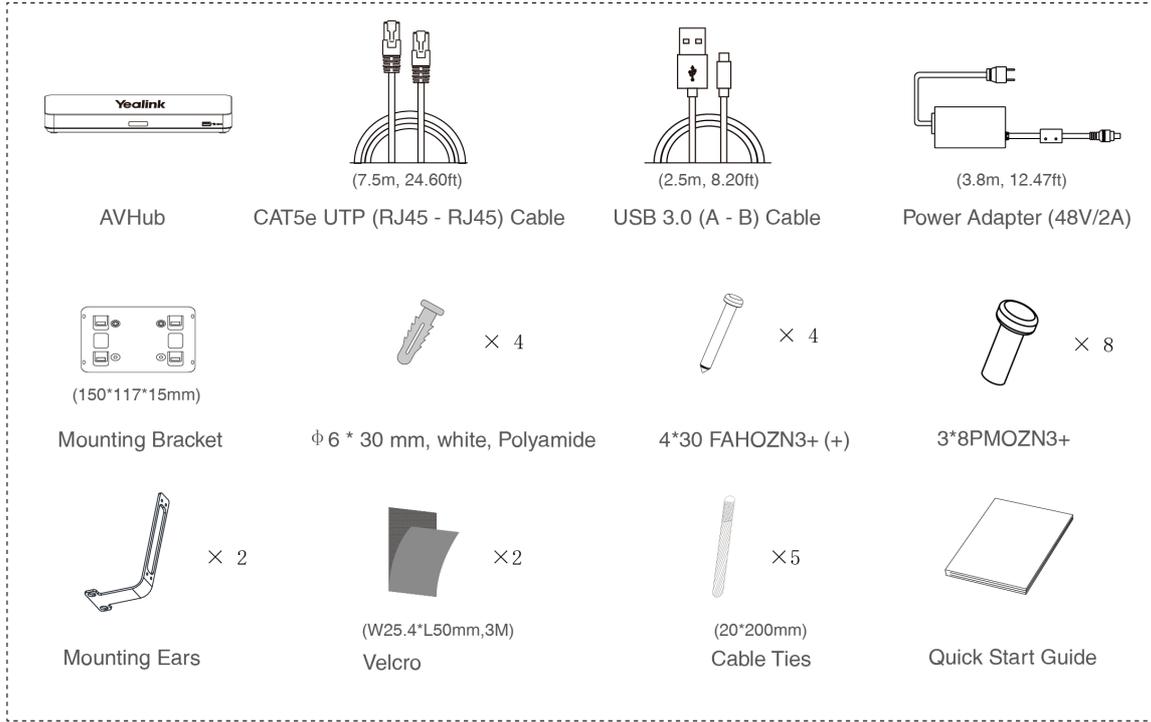


AVHub Package

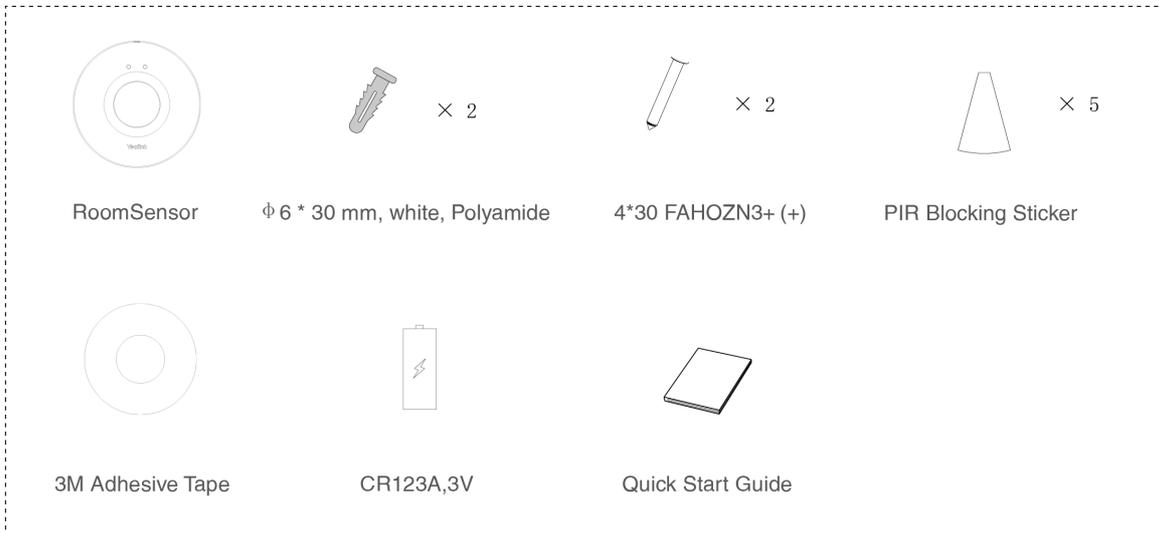

RoomSensor Package



MVC-BYOD-Extender Package




Pen Holder

Install ZVCS90-C5-007

- MCore Pro supports: mount on the wall, mount on the TV, stick to the table.
- MTouch Plus supports: put on a table, paste on a table, fixed on a table, mount on the wall.
- UVC86 supports: put on a flat surface, mount on top of a display, mount on the wall, mount on the ceiling, mount on the TV mount.
- AVHub supports: mount on the wall, stick under the table, put on the desk, mount on the rack.
- RoomSensor supports: mount on the ceiling, mount on the wall.
- Install and deploy the accessories in the system according to the environment and actual needs. For how to install and deploy, please refer to the quick start guide of each product.

Connect ZVCS90-C5-007

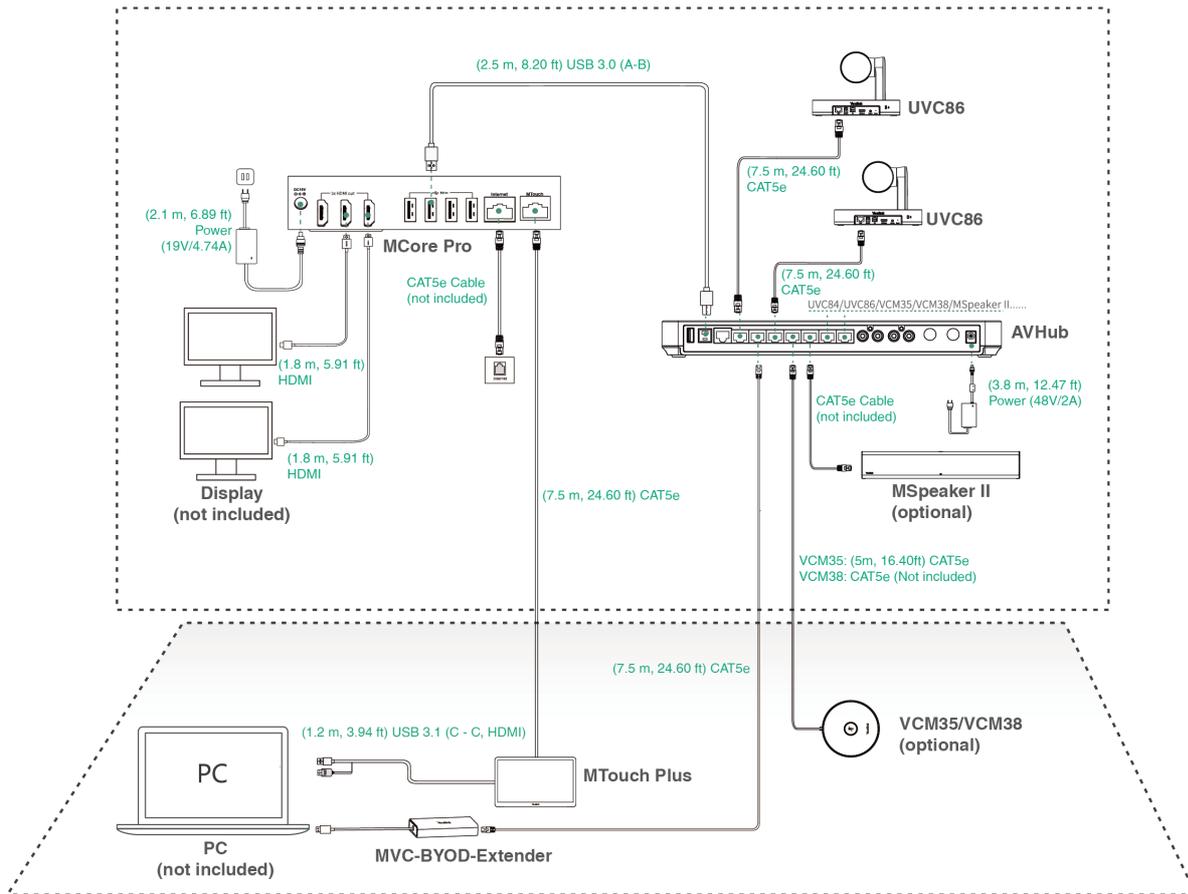

NOTE

- When starting up the system for the first time, you need to connect a mouse to complete the initial configuration. We recommend using the wireless mouse and keyboard kit.
- When you connect the UVC84/UVC86/MSpeaker II directly to the AVHub, the total number of connections must be no more than 4 devices. If the total number of connections exceeds 4 devices, you need to connect a PoE switch (the PoE switch must meet the 802.3 AT (PoE+) standard). We recommend using Yealink RCH40.
- Not included accessories requirements:
 - Display: Resolution of 1080p or higher and with an HDMI port.
 - PC: Equipped with HDMI or USB-C (support DP protocol) Port.
 - Ethernet cable: CAT5e or higher ethernet cable.
 - HDMI: Standard HDMI cable.

Initial Setup

1. Press the power button on the bottom left of MCore Pro, and the Microsoft Windows 11 IoT Enterprise Edition operating system will be automatically loaded after starting MCore Pro.

NOTE

When starting up the system for the first time, you need to connect a mouse to complete the initial configuration. We recommend using the wireless mouse and keyboard kit. After the system is initialized, you can use MTouch E2 to complete the system login and settings, and the device will automatically start the Microsoft Teams conference system application and enter the setting page.

2. Log in to your Zoom Rooms account.
 - Tap Sign In on the start meeting screen.
 - Enter your email address and password.
 - Tap Sign In.

Features

Control UVC86 Camera Position

1. Tap Camera Control during a meeting.
2. Tap or to zoom camera in/out.
3. Tap the navigation keys to pan/tilt the camera.

Pair with a RoomSensor

1. Switch to Admin mode.
2. Open Yealink RoomConnect Software from Desktop.
3. Go to **MTouch Plus > Sensor**.
4. Add sensor. Select the right sensor to pair.

Remove the back cover of RoomSensor, you will see its name on the top. Then select accordingly.

NOTE

- A MTouch Plus can be paired with one RoomSensor at most.
- The distance between MTouch Plus and RoomSensor needs to be within 20m.